

TV1-003H

TELEVISION MOUNT

INSTALLATION INSTRUCTIONS



Thank you for choosing a MORryde television mount! The rigid adjustable mount is designed to mount flat panel televisions or monitors weighing up to 50 lbs to a horizontal surface like an RV counter, and offers 5" of vertical adjustment.

Key Features and Benefits

- Adjusts up and down to fit TV
- Easily mounted to a horizontal surface
- No assembly required

Range of Motion

- 5" of vertical height adjustment

Product and Safety Information

The TV1-003H mounts flat panel televisions or monitors to a horizontal surface.

NOTE: This mount is not intended for use on brick, concrete, concrete block.

VESA* Mounting Plates

- 75mm x 75mm
- 100mm x 100mm
- 100mm x 200mm
- 200mm x 200mm

* Video Electronics Standards Association

Weight Capacity

- 50 lbs

Parts List

1. TV Bracket
2. Mounting Plate
3. Hardware Pack

⚠ WARNING Improper installation may cause property damage or personal injury. The mounting surface may require reinforcement as it must be capable of supporting five times the combined weight of the television and the mount.

The installer assumes all responsibility of verifying that any installation method and mounting surface securely support the television and mount. MORryde is not liable for property damage or injury caused by incorrect mounting, installation methods not recommended by MORryde, hardware not provided by MORryde, or incorrect use of the mount during travel or otherwise.

Preparation

Television Stand

If applicable, remove the original base stand in accordance with the television owner's manual.

Hardware

Use appropriate hardware for securing your television to the mount and mounting your television to the mounting surface.



M4x12mm Bolt (4)



M5x12mm Bolt (4)



M6x12mm Bolt (4)



1/4" x 1" Lag Bolt (8)



M6 Flat Washer (8)



#10 Flat Washer (8)



1/4" Flat Washer (8)

Installation


⚠ WARNING Using mounting hardware too long for your application may puncture exterior structures.

⚠ WARNING If your television came with a stand, please remove the stand by referring to your television's owners manual and ensure the hardware has been removed from the mounting holes.

STEP 1

Secure the bracket to mounting surface: Pre-drill holes using a 1/8" drill bit for use with 1/4" lag bolts. Use lag bolts or self-drilling screws (depending on your mounting surface) with 1/4" washers to secure base of bracket to the mounting surface.

Depending on the size of the television, adjusting the height of the mounting plate may be required. Tighten side bolts securely after adjustment.

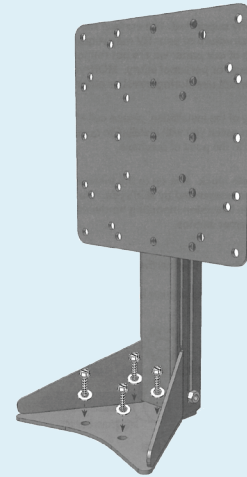

STEP 2

Secure the TV to the mounting plate: Line up the hole pattern on your television with the matching hole pattern on the universal mounting plate as close to the center as possible. Use the appropriate mounting hardware to secure the television to the mounting plate.

⚠ WARNING Step 2 may require two people to lift the television safely into place. MORryde is not responsible for property damage and/or personal injury due to improper or unsafe installation practices.

