

TV5-004H

TELEVISION MOUNT

INSTALLATION INSTRUCTIONS



Thank you for choosing a MORryde television mount! This low profile rigid mount is designed to mount flat panel televisions to a vertical surface and is perfect for tight spaces.

Key Features and Benefits

- Includes 2 docking stations
- Up to 100 x 100 VESA pattern
- Move entertainment wherever you want it

Range of Motion*

- Rigid Wall Mount

Product and Safety Information

The TV5-004H mounts flat panel televisions or monitors to a vertical surface.

NOTE: This mount is not intended for use on brick, concrete, concrete block.

VESA* Mounting Plates

- 75mm x 75mm
- 100mm x 100mm

* Video Electronics Standards Association

Weight Capacity

- 25 lbs

Parts List

1. Docking Station
2. Mounting Plate
3. Hardware Pack

⚠ WARNING Improper installation may cause property damage or personal injury. The mounting surface may require reinforcement as it must be capable of supporting five times the combined weight of the television and the mount.

The installer assumes all responsibility of verifying that any installation method and mounting surface securely support the television and mount. MORryde is not liable for property damage or injury caused by incorrect mounting, installation methods not recommended by MORryde, hardware not provided by MORryde, or incorrect use of the mount during travel or otherwise.

Preparation

Television Stand

If applicable, remove the original base stand in accordance with the television owner's manual.

Hardware

Use appropriate hardware for securing your television to the mount and mounting your television to the mounting surface.



M4x12mm Bolt (4)



M5x12mm Bolt (4)



M6x12mm Bolt (4)



1/4" x 1" Lag Bolt (8)



M6 Flat Washer (8)



#10 Flat Washer (8)



1/4" Flat Washer (8)


Installation

⚠ WARNING Using mounting hardware too long for your application may puncture exterior structures.

⚠ WARNING If your television came with a stand, please remove the stand by referring to your television's owners manual and ensure the hardware has been removed from the mounting holes.


STEP 1

Secure both docking stations to the wall/mounting surface: Pre-drill holes using a 1/8" drill bit. Use 1/4" lag bolts and 1/4" washers to secure the docking stations to the mounting surface.

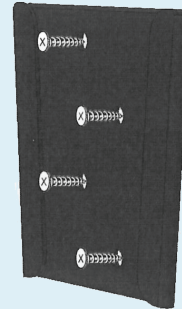

STEP 2

Secure the television to the mounting plate: Line up the hole pattern on your television with the matching hole pattern on the mounting plate. Use the appropriate mounting hardware to secure the television to the mounting plate.

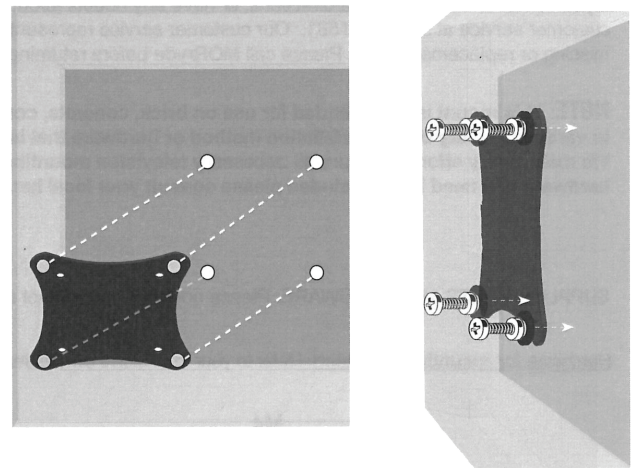

STEP 3

Slide the mounting plate with television into desired docking station.

