

QUICK CONNECT STEP

PRE-INSTALLATION INSTRUCTIONS


Will the Quick Connect Step work for your RV? Please review the steps below.

STEP 1 MOUNTING SPACE
Measure the space between the bottom of the threshold and the opening for the current steps. A minimum distance of 1.75" is required to attach the steps.




NOTE: The steps will not work for doors with trim under the threshold.

STEP 2 INTERNAL FRAMING
The brackets require structural reinforcement **behind** the skirt metal and below the threshold. Units that do not have any reinforcement for the brackets will require modification. For questions contact our Parts Department at 574-293-1581.

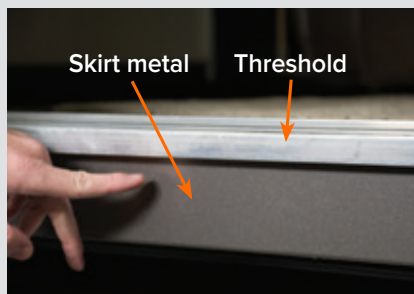

STEP 3 STEP HEIGHT
Measure from the top of the threshold to the ground. Refer to the Fit Chart below for the corresponding Quick Connect Step part number.

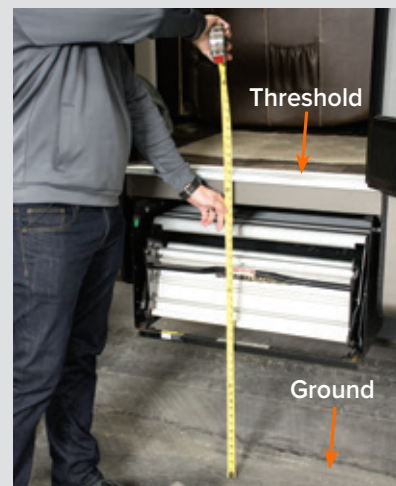

If you have met the requirements above, use the dimensions from Step 3 to locate your part number in the fit chart below.

FIT CHART

	PART NUMBER	STEP HEIGHT
2 STEP	STP54-011H	21.5" – 27.5"
3 STEP	STP54-010H	27.5" – 36"
4 STEP	STP54-012H	35.5" – 44"

OPTIONAL HANDRAIL



3 STEP HANDRAIL
STP214-029H

4 STEP HANDRAIL
STP214-006H



Above. Beyond. Always.

Please contact us if you have any questions:
574-293-1581 | www.MORryde.com


INSTALLATION INSTRUCTIONS

Please take a moment to review the **Quick Connect Step Pre-Installation Instructions** on the front side of this form before proceeding with these Installation Instructions.

TOOLS REQUIRED: 3/8 drive socket

STEP 1

Line up the first bracket with the outside edge of the door. Verify the placement of the bracket by properly positioning the steps; also confirm clearance of the door. If satisfactory, install the first mounting bracket using the supplied hardware.

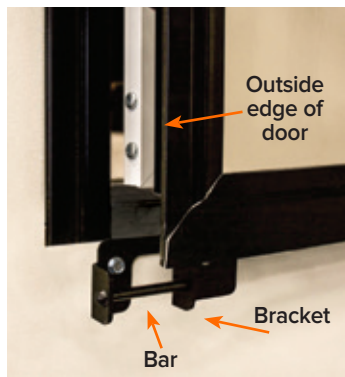



NOTE: The two brackets are identical. For proper installation, mount both brackets with the bar offset to the left.



Both brackets will be mounted with the bar offset to the left.

STEP 2

Press in the paddle latch and attach the step to the bar on the bracket that was first installed; you will use this as a guide for the location of the second bracket. With the steps in position, mount the second bracket.

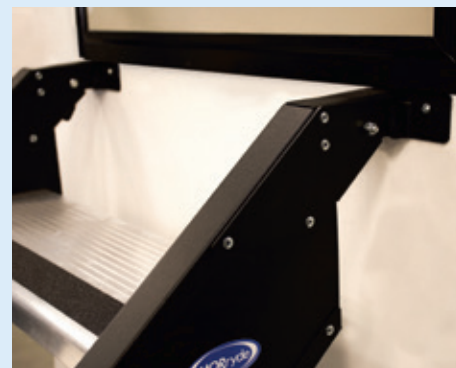

TO RELEASE THE STEPS:

Press in the paddle latches and pull back to remove the step from the mounting brackets.

⚠ WARNING Improper installation may cause property damage or personal injury. The Installer assumes all responsibility of verifying the safety and viability of any installation method and mounting surface. MORryde is not liable for property damage or injury caused by incorrect mounting, installation methods not recommended by MORryde, hardware not provided by MORryde, or incorrect use during travel or otherwise.

If you have any questions, please give us a call at **574-293-1581** or send an email to **parts@MORryde.com**.



Above. Beyond. Always.

574.293.1581 • www.MORryde.com